


MOBILE WIRE UNIT

Assembly Instructions


STEP 1: Attaching Caster Wheels to Poles

1. Components: 4 Poles and 4 Caster Wheels
2. ~~Push~~ ^{Pound} castor wheel stem into bottom of pole. Once wheel is tightly secured lock wheel. Repeat for the next 3 poles.




STEP 2: Attaching Clips for Bottom Shelf

1. Components: 4 Poles (from Step 1) and 4 Clips (8 halves).
2. Attach a two piece clip at the desired location at the bottom of poles. Be sure that the small end of the clip is pointing in the upward direction. The ridge inside of the clip should be aligned with the groove in the pole. Snap clip firmly into pole. See Figure B.

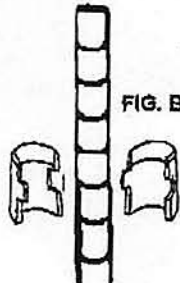


STEP 3: Install Bottom Shelf

1. Components: 1 Shelf.
2. Place your shelf on its side. Holding the shelf, slide each pole through the shelf-cylinders starting from the top of the pole. Push each pole until the plastic clip is snug into the shelf cylinder. Note that the wire surface is on the top of the shelf. See Figure C.
3. To place the unit upright, hold the sides of the shelf and bring downward gently. Press firmly against shelf until shelf cylinders are firmly over the shelf clips.

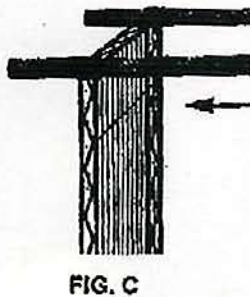

STEP 4: Installing 2nd Shelf

1. Components: 4 Clips Per Shelf and Shelf
2. Attach a two piece clip at the desired location of the poles. Be sure that the small end of the clip is pointing in the upward direction. The ridge inside of the clip should be aligned with the groove in the pole. Snap clip firmly into pole.
3. Holding the shelf by its sides slide the shelf over the poles. Push the shelf firmly downward over the shelf clips. Shelf should fit firmly over clips.

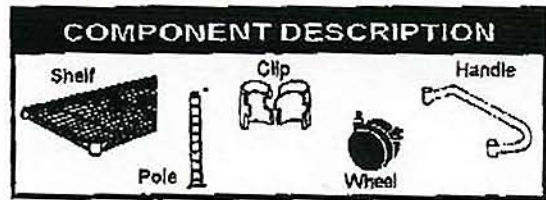

STEP 5: Installing Chrome Handle (If applicable)

1. Components: 2 Clips and 1 Handle
2. Attach a two piece clip at the desired location of the posts.
3. Slide the handle over the posts. Push the handle firmly downward over the clips until tight and snug. See Fig. D

STEP 6: Installing 3rd & 4th Shelf

1. Repeat step 4.

